










BETRIEBSANLEITUNG
OPERATING INSTRUCTIONS
INSTRUCCIONES DE SERVICE
ISTRUZIONI D'USO
HANDLEIDING
INSTRUCCIONES PARA EL MANEJO
MANUAL DE INSTRUÇÕES
NAUDOJIMOSI INSTRUKCIJA
KASUTUSJUHEND
LIETOŠANAS INSTRUKCIJA
DRIFTSINSTRUKS
DRIFTSINSTRUKTIONER
DRIFTSVEJLEDNING
INSTRUKCJA OBSŁUGI

KEZELÉSI ÚTMUTATÓ
NÁVOD K OBSLUZE
NAVODILO ZA UPORABO
NÁVOD NA OBSLUHU
UPUTE ZA RAD
MANUAL DE OPERATII
TREORACHA OIBRIÚCHÁIN
ΟΔΗΓΙΕΣ ΧΡΗΣΗΣ
EL KITABI
ИНСТРУКЦИИ ЗА ЕКСПЛОАТАЦИЯ
ИНСТРУКЦИЯ ПО ЕКСПЛУАТАЦИИ
取扱説明書
사용설명서
使用说明书



T 4.40DSK

MAKE IT BECKER.











 	
	
 <p><input checked="" type="checkbox"/> AIR</p>	 
	 





1

<p>MAX. PRESSURE</p> <p>MAX. VACUUM</p>	 <p>mbar</p>
	 <p>MAX.</p> <p>m³/h</p>
<p>L_{PA})))</p> <p>DIN EN ISO 11203 Accuracy Class 2 K_{PA} = 3 dB(A) l=1m</p>	<p>Standard</p> <p>L_{PA} = 68/70 dB(A) [50/60Hz]</p> <p>T 4.40DSK-34</p> <p>L_{PA} = 72/74 dB(A) [50/60Hz]</p>







2

			
<input checked="" type="checkbox"/>			
			
			<p>46,0 kg 101,5 lbs</p>


3
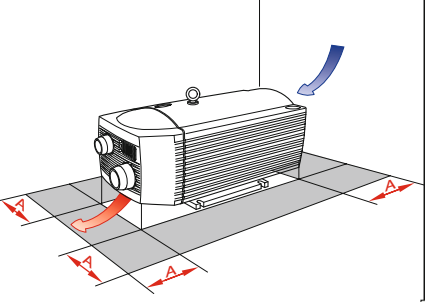
<p>A > 100mm A > 4"</p>	 <p>> 5°C/41°F < 45°C/113°F</p>	 <p>max. 90%</p>	 <p>max. 800m ↑</p>
			

4

 <p>6 mm</p>	
 <p>5 mm</p>	
 <p>T 20</p>	

5

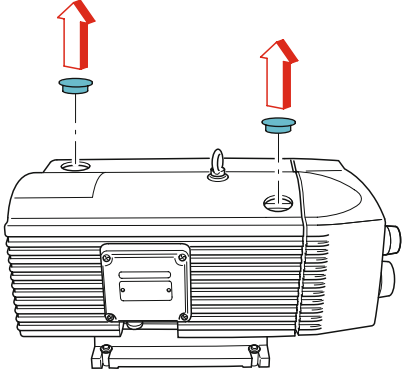
--


6

MOTOR-PROTECTION =

50Hz		60Hz	
XXX / 2XXX V	XXX / 2XXX V	XXX / 2XXX V	XXX / 2XXX V
002 / 002 A	002 / 002 A	002 / 002 A	002 / 002 A

SERVICE FACTOR X **RATED CURRENT**

7

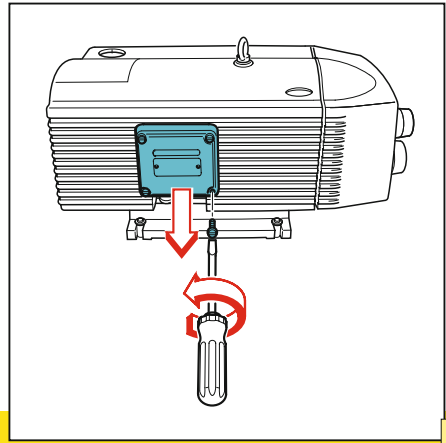


3 ph

L2 L1 L3
U1 V1 W1

ON (I) - 1 2 **MAX 10x/h**
OFF (0) -

9

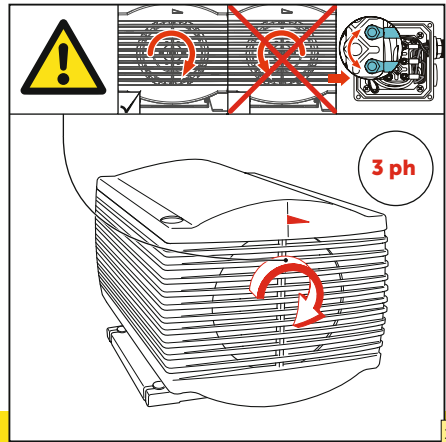





0 2 10 [m]

3/4" 1" + 2x

PRESSURE VACUUM

11

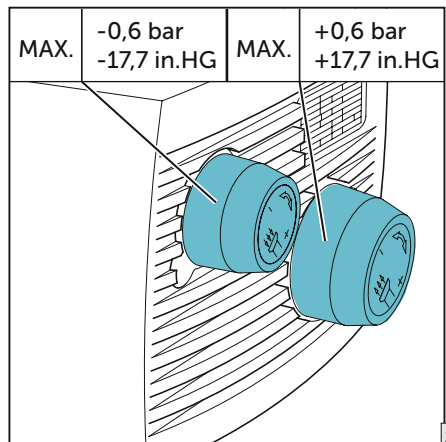




n=0min⁻¹

2-3 Min




13


14

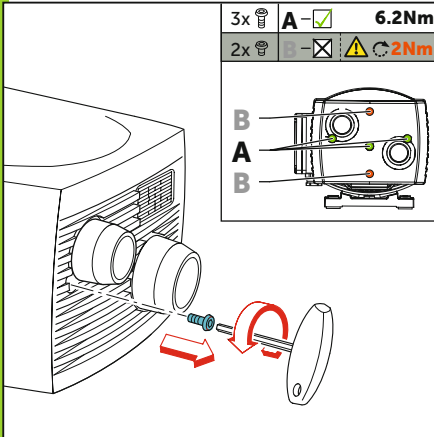


15

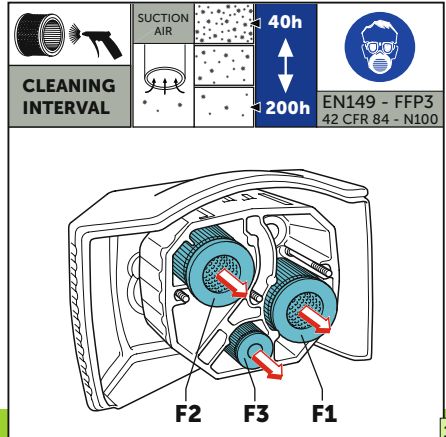


16

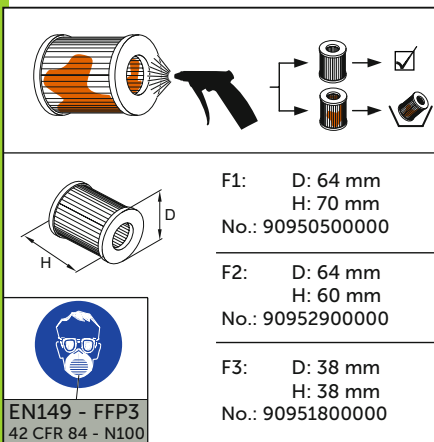


17

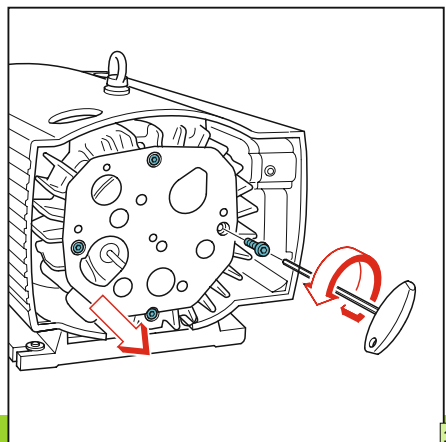


18




3000 h



Standard
 $A_{\text{MIN}} = 28\text{mm}$
T4.40DSK-34
 $A_{\text{MIN}} = 31\text{mm}$
 $A_{\text{H}} < A_{\text{MIN}}$ → 

→ No. 90135200007 (SET)

19

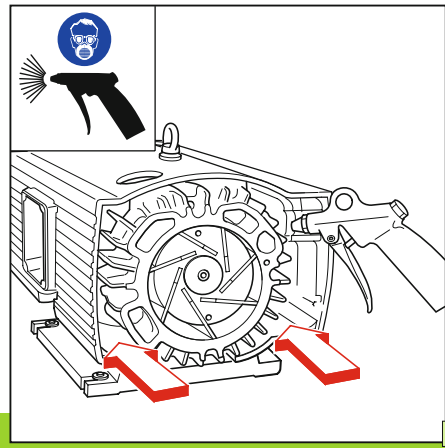

20



www.becker-international.com

21



WWW.BECKER-INTERNATIONAL-SHOP.COM

Gebr. Becker GmbH
 Hoelker Feld 29-31
 42279 WUPPERTAL
 GERMANY
info@becker-international.com
www.becker-international.com

 **BECKER**



MAKE IT BECKER.

28100027603 | 2021-10-21 | All rights reserved